


Octo FX²™

New!

Model OFX803

- > HD Seamless Switcher for Conference Rooms, Houses of Worship and Large Screen Projections
- > 8 Universal Inputs with Audio:
 - PAL / NTSC / Secam, S.Video, RGB, YUV, HDTV
 - Computer up to UXGA
- > Analog and digital inputs/outputs up to 1080p
- > Animated or Still Logo, Fade, Tiling, Cut and Frame Stores

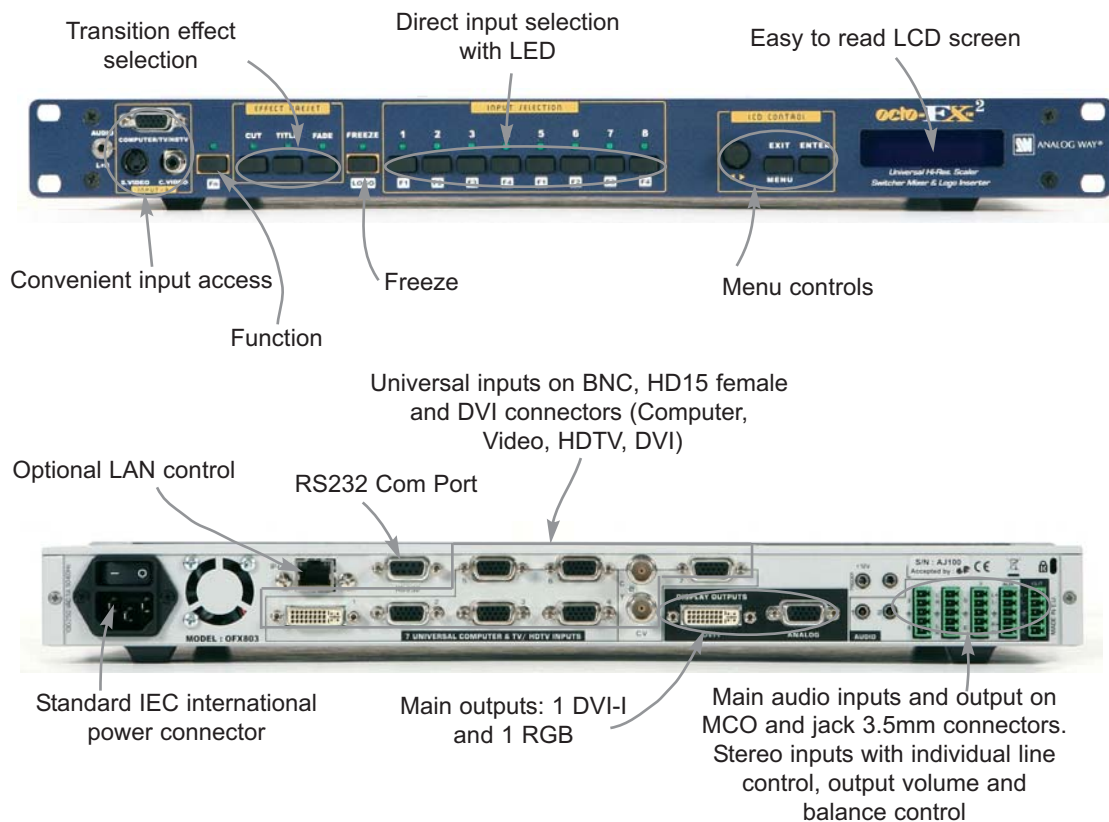

Inputs

- 8 universal inputs with 1 DVI
- Computer and DVI up to UXGA / 1080p
- Video : NTSC/PAL/SECAM, S. Video, YUV, RGB, HDTV
- 8+1 Stereo Audio with level adjustment for each input

Outputs

- Main : 1 DVI + 2 RGB up to UXGA / 1080p
- Audio Stereo Main with level adjustment

Effects

- Fade, Tiling, Seamless Cut
- Ultra fast and smooth or colored switching
- Logo insertion : 1 still or 8 animated logos
- 4 frame stores in non volatile memory



ANALOG WAY®

www.analogway.com

P/N: OVP831-A1006-VA

TECHNICAL SPECIFICATIONS

8 UNIVERSAL INPUTS:

- **Composite Video**
NTSC = 15.735 kHz/60 Hz
PAL/SECAM = 15.625 kHz/50Hz
- **S.Video (Y/C)**
NTSC = 15.735 kHz
PAL/SECAM = 15.625 kHz/50Hz
- **Component (YUV)**
15.625 kHz/50 Hz - 625L
15.735 kHz/60 Hz - 525L
- **RGB/S** (TTL or 0.3V Analog), RGB (SOG: 0.3V Analog), 15.625 kHz/50 Hz - 625L, 15.735 kHz/ 60 Hz - 525L
- **HDTV:** Component (HDYUV 2/3 Level Sync.) 1080i/60-50Hz, 720p/60-50Hz, 480p/60Hz
- **Computer** (RGB HV, RGB/S and RGsB): PC, Mac, Workstation. Automatic Sync. & centering. Resolution from 640x480 to 1600x1200 (up to 110kHz)
- **DVI:** Digital computer up to 1600x1200 RB/60Hz and 1920x1080/60Hz (Fpx: 165MHz max)

AUDIO INPUTS:

- 8 + 1 Stereo Inputs
- 2 balanced audio inputs
- 7 unbalanced audio inputs
- Vi = + 18 dBu max
- Zi = 20 kOhms unbalanced
- Zi = 40 kOhms balanced
- Gain: adjustable

MAIN DISPLAY OUTPUT:

- 2 x Buffered outputs (1 on HD15 F connector and 1 on DVI-I connector) RGB HV, RGB/S or RGsB selectable (H&V separated, Sync. Composite or SOG), RGB= 0.7Vp/p (75 Ohms)
- 1 x DVI-D on DVI-I connector
- Resolution: 4/3 & 5/4 = SVGA, XGA, SXGA+, UXGA, 16/9 & 16/10 = WVGA, WSVGA, WXGA, WSXGA, WSXGA+, 1080p
- Rate: Internal 50, 60, 72(*) & 75(*) Hz (Follow)
- (*) : depending on resolution

AUDIO OUTPUT:

- Stereo output (balanced & unbalanced)
- Vo = + 18 dBu max - Zo = 300 Ohms (unbalanced)
- Vo = + 24 dBu max - Zo = 600 Ohms (balanced)
- G = 0dB nominal, with volume

USER CONTROLS and CONNECTORS: FRONT PANEL:

- User controls:
 - Selection of inputs 1 to 8 and frame stores
 - Programmable effect keys
 - Freeze, Logo
 - LCD window & control buttons for menu: Test patterns, proc. image adjust., input format selection, output format display, output format & sync., audio input level and output, volume adjustments, position & size adjustments, front panel control lockout
- Input Connectors:**
 - Input #8: Video - RCA, Mini DIN 4 and HD15F
 - Audio - Jack Stereo 3.5

BACK PANEL:

- Input Connectors:**
 - Input #1: DVI-I
 - Inputs #2 to #6: HD 15F
 - Input #7: HD 15F + 2 BNC
 - Audio inputs 3 to 7 and auxiliary: on 5-pin screw terminal
 - Audio inputs 1 and 2: on 3.5 jack stereo
- Output Connectors:**
 - Main Video: DVI-I + HD 15F
 - Main Audio: 5-pin screw terminal

Others:

- 1 x DB9F with 2 RS232 ports
- 1 x Jack 3.5 : +12Vdc trigger
- Optional Ethernet Port 10/100BT: RJ45

POWER SUPPLY:

- Internal, universal, automatic, 100-250 VAC; 50/60 Hz (50 W) (UL, CSA, GS, CE), ON/OFF AC Main Switch

- DIMENSIONS:** 19", 1U Compatible
D 10.4" x W 19" x H 1.74"
D 265 mm x W 482 mm x H 44 mm

- WEIGHT:** 3.5 kg (7.7 lbs)

SUPPLIED WITH:

- 1 x Power cable
- 1 x Set of 5 audio 5-pin screw terminals
- 1 x DVI-VGA adapter

OCTO FX²™ by Analog Way is a **High Resolution Digital and Analog, Computer & Video Scaler Seamless Switcher. OFX803** offers many effects: Fade, titling, logo insertion (1 animated or 8 still) and frame store.

OFX 803 is fitted with 8 Universal A/V inputs including one DVI, and 3 outputs: 2 Analog and 1 DVI. It performs an ultra fast and smooth transition between any Video or Computer sources. It also allows a true seamless cut between one computer Input (direct) and any other Video or Computer Input.

Title Effect: **OFX 803** can mix a Computer source with a Title with any Video or Computer source. The title remains on the screen during the transition. **OFX 803** also features a shadow title effect with settable vertical size and position that enhances the readability of the titling text over very bright images. The size, position and density of this area can be adjusted.

Fade Effect: **OFX 803** features cross-fade effects between Computer and Video (TV/HDTV) or Computer sources, with adjustment of the cross-fading duration.

Logos and Frames: **OFX 803** can store in its non volatile memory 8 Still or 1 Animated Logos and 4 Full Frame Images in true Hi-Res. 16 million colors. Recording is done either by direct acquisition from Input source or from Computer download of image files. Up to 2 Logos can be assigned to each input to be displayed at any position on the output screen. Logos can have any shape due to the keying capability, and transparency is user adjusted. Full Frames can be used as welcome or transition image.

OFX 803 is a High Performance State of the Art Up/Down Video and Computer Scaler. Ready to fit the native resolution of the latest HD display devices, it provides a high quality image thanks to its high quality digital decoder, improved 3:2 and 2:2 pull down circuitry, auto-adaptative pixel by pixel 3D motion compensation, time base corrector, frame rate converter & follower.


Easy to use, **OFX 803** offers an Auto Setup function and a powerful Auto Clock & Phase for Computers. Each input image control - brightness, contrast, color, hue, processing, aspect ratio, zoom, etc ... - can be individually set and stored in non volatile memories.

Each of the 8 Inputs is fitted with a stereo audio line. The audio can either follow or break away from the Video image. One additional audio stereo input is provided to be mixed with the Video input audio line. **OFX 803** is fitted with a Dual RS232 Com port for Integral remote control and automatic control of other devices in the installation. Full Firmware upgrade maintains high value to your equipment through permanent additional possibility in the unit life time. Upgrades are available on Analog Way web site. An optional TCP/IP connection allows far away remote and/or upgrade.

This ultra compact and user friendly device is especially dedicated to high resolution A/V presentation displays, conference and boardrooms, and events.

To control the Octo FX² :

- **RKD500-T:** Remote console with T-Bar
- **RKD500:** Remote console
- **RKD100:** Remote console
- **Axion:** High End Remote controller

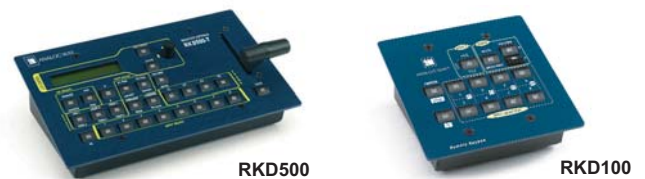

Cables for the Octo FX²

- **S.Video Cables** from 1.8m/6ft to 20m/66ft - Refs 10009 - 10093 - 10094 - 10095
- **S. Video to BNC Cables** of 1.8m/6ft and 5m/16ft - Refs 10102 - 10103
- **RCA Cable** of 1.2m/4ft - Ref. 10010
- **RCA / BNC Adapter Cables** - Ref. 10011
- **Jack Stereo Cable** of 1.2m/4ft - Ref. 10012
- **Audio Stereo Cable** of 1.2m/4ft - Ref. 10013
- **VGA Cables** from 0.4m/1ft to 1.8m/6ft - Refs 10014 - 10015 - 10077
- **VGA/BNC adapter Cables** of 1.8m/6ft and 3m/10ft (MM/et F/M) - Refs 10023 - 10024 - 10025 - 10026
- **Remote Cables** from 0.5m/1ft to 30m/100ft - Refs 10109 - 10110 - 10111 - 10112 - 10113 - 10114

- 1 x HD15F-5BNC/F adapter cable of 0.5m (1.5ft)
- 1 x Remote control software
- 1 x User Manual

WARRANTY: 3 year warranty on parts and labor back to factory

Specifications subject to change without prior notice

ANALOG WAY