

CHRISTIE LX66

Wide Open Possibilities for Powerful Displays

Uses

Boardrooms

Large conference rooms

Small auditoriums

Rental/Staging

Worship


The Christie LX66 makes powerful presentations easy to achieve with high brightness, high contrast images, and options for every application.

With 6500 lumens and 1300:1 contrast ratio, a full range of optional lenses and input modules, the Christie LX66 offers the broadest range of installation and operational flexibility in its class.

State-of-the-art high bandwidth electronics support signals up to UXGA and video up to 1080i. Latest 10-bit video processing reproduces images flawlessly. New standard input modules include on-board edge-blending and image warping for the ultimate dynamic displays.

The dual lamp design provides brightness when needed and redundant lamp operation in single lamp mode. With legacy support for lenses and modules from the popular RoadRunner Series, the Christie LX66 fits seamlessly into any application.

Simply put, the Christie LX66 offers endless possibilities for the most dazzling presentations.

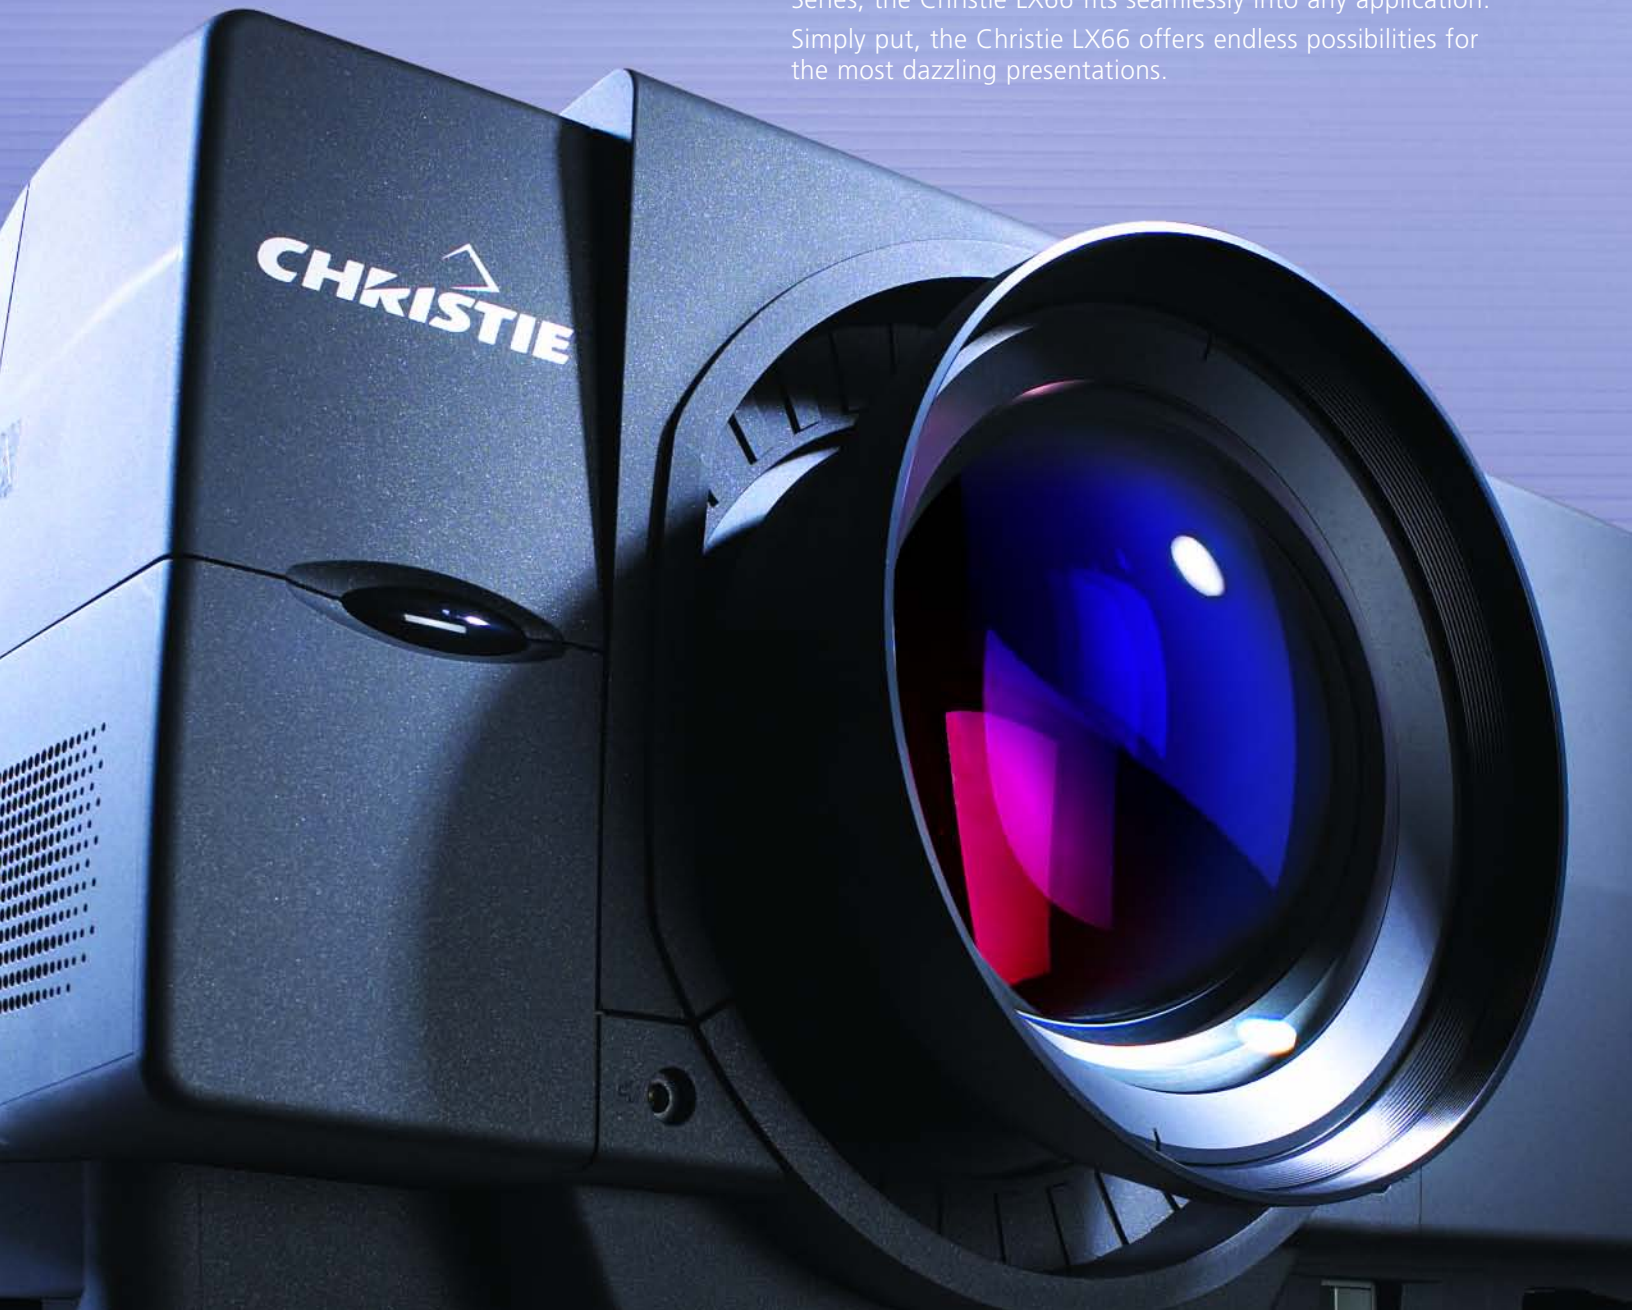

Christie LX66

Specifications



IMAGE

- 6500 ANSI lumens (dual lamp)
- 3250 ANSI lumens (single lamp)
- 90% brightness uniformity
- Contrast ratio: 1300:1 full field

DISPLAY TECHNOLOGY AND RESOLUTION

- 3-panel 1.4" LCD
- Native XGA 1024 x 768 resolution

INPUT SIGNAL COMPATIBILITY

- VGA through to UXGA (1600 x 1200)
- Accepts and displays all currently known HDTV formats (720p@60, 1080i@60, 1080i@50, 1035i)
- Multi-standard video decoder
- Horizontal and vertical scaling all inputs

LAMP

- Dual 300W lamps
- 1,500 hours per lamp, typical life

POWER REQUIREMENTS

- Line voltage 100V AC to 240V AC +/- 10% @ 50/60 Hz
- Power consumption: 950W maximum
- Operating current: 9.5A maximum @ 100V AC; 4.5A maximum @240V AC

OPERATING ENVIRONMENT

- Temp: 40°F to 95°F (5°C to 35°C)
- Humidity: 20%–80% (non-condensing)
- Altitude: 0–8850' (0–2700m)

DIMENSIONS

- Weight: 54.3 lb (24.7 kg)
- Size: 23.8" L x 20.4" W x 9.9" H (606mm L x 518mm W x 252mm H)

The Christie LX66 gives you bright, detailed images with 6500 lumens brightness and 1300:1 contrast ratio.



Broad source compatibility, a range of lens configurations and multiple control methods, including optional ChristieNET™ networking, make any presentation effortless.



New standard on-board warping and edge-blending input modules give you the flexibility to place the perfect image virtually anywhere.

SCAN RATES

- Horizontal – 15 to 120 kHz
- Vertical – 50 to 120 Hz
- Pixel clock – 230 MHz

INPUTS

- DVI-D (digital) and HD15 (analog)
- 5-BNC: RGBHV/YPbPr
- Composite video, S-video
- USB type A and B
- DB9 RS-232
- Wired remote jack

GRAPHICAL USER INTERFACE

- Auto set-up feature
- "Direct Access" intuitive user interface for complete projector control in eleven world languages
- Auto power up feature

OPTICAL SYSTEM

- Motorized horizontal (+/- 20%) and vertical (+/- 100%) offset
- Built-in light shutter

AUDIBLE NOISE

- 43dB

STANDARD ACCESSORIES

- RF remote (w/ batteries), line cord, user manual
- Computer cable (Dsub15 to Dsub15)
- DVI cable
- Warping & Blending module
- Warping & Blending software
- Real Color Manager Pro software

OPTIONAL ACCESSORIES

- Fixed lenses: 1.0:1, 1.5:1, 8.9:1
- Zoom lenses: 1.8-2.3:1, 2.0-2.6:1, 2.6-3.3, 3.3-4.5:1, 4.5-5.8:1, 5.6-8.0:1, 8.1-11.6:1
- Shipping case
- Ceiling mount
- Dual HD/HD-SDI input module
- DVI Input module
- ChristieNET™

REGULATORY APPROVALS

- CSA C22.2 No.950, UL 1950, cUL, IEC950 (EN60950), FCC Class A, EN55022 class A, CE

WARRANTY

- Product warranty, 3 years parts and labor (excluding lamp)
- Lamp warranty: 120 days or 500 hours (whichever comes first)

Corporate Offices

USA
10550 Camden Drive
Cypress, CA 90630
PH: 714-236-8610
FX: 714-503-3385
Toll free: 800-407-7727 (NA only)
sales-us@christiedigital.com

CANADA
809 Wellington Street North
Kitchener, Ontario N2G 4Y7
PH: 519-744-8005
FX: 519-749-3136
Toll free: 800-265-2171 (NA only)
sales-canada@christiedigital.com

Worldwide Offices

UNITED KINGDOM
PH: +44 118 977 8000
FX: +44 118 977 8100
sales-europe@christiedigital.com

GERMANY
PH: +49 2161 664540
FX: +49 2161 664546
sales-europe@christiedigital.com

FRANCE
PH: +33 (0) 1 47 48 28 07
FX: +33 (0) 1 47 48 26 06
Mobile: +33 (0) 6 76 47 43 62
sales-france@christiedigital.com

SINGAPORE
PH: +65 6877 8737
FX: +65 6877 8747
sales-singapore@christiedigital.com

SHANGHAI
PH: +86 21 6278 7708
FX: +86 21 6278 7707
sales-china@christiedigital.com

BEIJING
PH: +86 10 6561 0240
FX: +86 10 6561 0546
sales-china@christiedigital.com

JAPAN
PH: +81 3 3559 7481
FX: +81 3 3559 7482
sales-japan@christiedigital.com